


6025 EC Fan




常用规格 General Specification

| | |
|--|---|
| 外框 (Frame) | PBT OF UL 94V-0 |
| 扇叶 (Impeller) | PBT OF UL 94V-0 |
| 轴承型号 (Bearing Type) | Sleeve Bearing & Ball Bearing & Hydro Bearing |
| 引线 (Lead Wires) | UL Type or Equivalent (+) : Red (-) : Black |
| 马达保护 (Motor Protection) | Reverse Polarity Protected; Automatic Restart |
| 工作温度和湿度 (Operating Temperature and Humidity) | -10°C ~ 70°C, 5% ~ 90%RH |
| 储存温度和湿度 (Storage Temperature and Humidity) | -40°C ~ 80°C, 5% ~ 95%RH |

风扇性能曲线 Fan Performance Curve

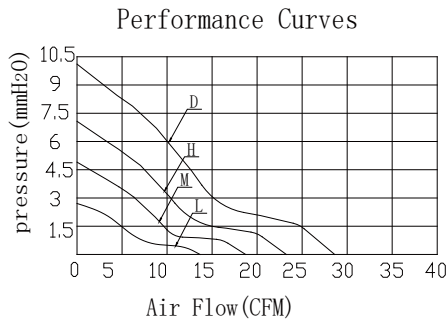

尺寸 Dimensions

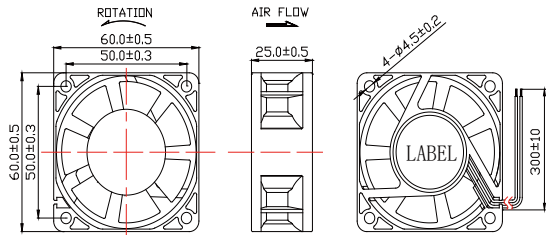

规格 Specifications

| 型号 Listed Model | 额定电压 Rated Voltage | 工作电压 Operating Voltage | 额定功率 Rated power | 转速 Rated Speed | 风量 Air Flow | 风压 Static pressure | 噪音 Noise Level | 可选功能 Available Features (Optional) | | | | 重量 Weight |
|-----------------------|--------------------------|------------------------------|------------------------|----------------------|-------------------|--------------------------|----------------------|---------------------------------------|------------------------------|--------------------------|-----------------------------------|--------------|
| | (VAC) | (VAC) | (W) | (RPM) | (CFM) | (mmH2O) | (dBA) | 转速侦测 Tachometer Output | 锁机报警 Rotation Detector | 温控 Thermal Control | 脉冲调速 Pulse Width Modulation | g |
| EFX602522L | 110/220 | 85~240 | 1.80 | 3,000 | 14.20 | 2.60 | 26.70 | • | • | • | • | 50 |
| EFX602522M | | 85~240 | 3.00 | 4,000 | 19.00 | 4.60 | 34.20 | • | • | • | • | |
| EFX602522H | | 85~240 | 4.00 | 5,000 | 23.70 | 7.10 | 40.00 | • | • | • | • | |

X=S:Sleeve Bearing or B: Ball Bearing or H:Hydro Bearing ; Specifications are subject to change without notice